

XM6004-5M

4CH 1HDD NVR with 4CH PoE



Key Features


- Up to 4ch IP cameras access
- Up to 5MP resolution recording
- Support 1ch HDMI, 1ch VGA, HDMI at up to 4K (3840x2160) resolution
- 1 SATA hard disk up to 12TB
- 1 RJ45 10M/100M network interface
- 4ch POE ports
- Smart search & playback
- Support cloud upgrade

Specification

Video Input	
IP Camera Input	4 Channel
Incoming Bandwidth	40 Mbps
Outgoing Bandwidth	40 Mbps
Video Output	
HDMI Output	3840×2160, 1920×1080, 1440×900, 1280×1024
VGA Output	1920×1080, 1440×900, 1280×1024
Decoding Capacity	1ch 12MP, 4ch 8MP@30fps
Dual Stream	Support
Multi-screen Display	1/4
Recoding	
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Playback and Backup	
Sync Playback	4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network
Network	
Interface	1 RJ-45 port (10/100 Mbps)
PoE	4 Ports (IEEE 802.3af), 40W
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	8 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF, SDK, CGI

Storage	
HDD	1 SATA Ports, up to 8TB for each HDD
eSATA	N/A
Cloud Storage	Support
Interface	
Audio I/O	1/1
Alarm Input	4ch
Alarm Output	1ch
USB	32 ports (USB 2.0 × 1, USB 3.0 × 1)
General	
Power Supply	DC48V/1.25A
Power Consumption	< 5 W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	255 × 237 × 47.5 mm (10.04 × 9.33 × 1.87 inch)
Net Weight	0.9 kg (1.98 lb) without HDD

Dimensions (mm)

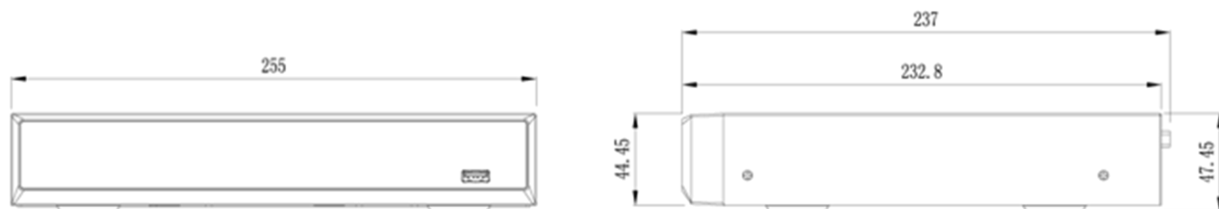

Rear Panel

